




Indoor Full Color LED Video Wall

TV-PM156-YX

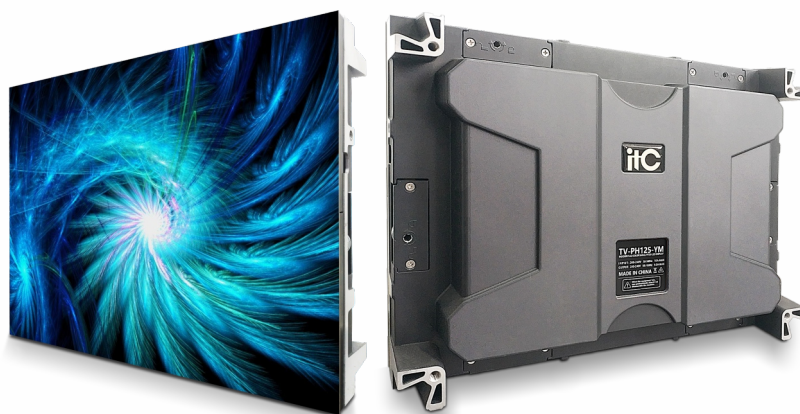

Description:

It has the characteristics of seamless splicing, perfect display, long service lifespan, fast frame changing speed, high refresh rate, good uniformity, wide viewing angle, high grayscale, natural color reproduction, etc. It is widely used in command and dispatch, security monitoring, video conference, studio display, and various conference display occasions.

Feature:

- * Used to monitor and display the situation in real time and play various advertisements.
- * Seamless splicing, and no visual black seam on the screen.
- * The display unit is flexible and compact, and supports flat and curved splicing.
- * DC low-voltage power supply, natural heat dissipation, no fan, and zero noise.
- * When a failure occurs, it only needs to maintain a single LED pixel or a single module, realizing low maintenance cost and fast maintenance speed.
- * Support picture correction, adopt gamma correction technology, achieve point-by-point brightness and color correction.
- * Support smart light control, smartly adjust brightness, improve picture comfort, and save energy.
- * With ultra-wide viewing angle, the screen has a larger viewing range, and the picture is still clear when viewed from any angle.
- * Support ultra-high refresh speed, good screen continuity and high screen fluency.
- * The picture is delicate and realistic, and the grayscale is still excellent in low brightness.
- * Support UHD display, adopt unique image quality enhancement technology to effectively improve image clarity, and the high-speed picture is smooth and no smear.
- * Support integrating 3D, touch screen and somatosensory games and other functions to improve entertainment and interactivity.


Specifications:

Model	B1.5625
LED encapsulation	SMD1010 black light
Pixel pitch	1.5625mm
Resolution	409,600 pixels/m ²
Lamp bead/IC	Nationstar copper wire / high refresh rate
Pixel configuration	1R1G1B
Cabinet resolution	256*192
Cabinet size (mm)	400*300
Cabinet weight	5kg/pc
Working voltage	DC +4.2V
Best viewing distance	≥4.5m
Horizontal viewing angle	≥160°
Vertical viewing angle	≥160°
Maintenance method	Front maintenance
Graphics card	DVI/HDMI/DP
Video signal	Compatible with PAL/NTSC/SECAM format, support S-Video; VGA; RGB; Composite Video; SDI; DVI; RF; RGBHV; YUV; YC, etc.
Control mode	Synchronous control
Drive device	Constant current drive
Refresh rate	≥3840Hz
Frame rate	≥60Hz
Scanning method	32S
Brightness	200~800CD/m ² (adjustable)
Grayscale	12/14/16bit
Contrast	≥10000:1
Decay rate (after 3-year work)	≤15%
Brightness adjustment method	Auto/Manual: 1~100%
Computer operating system	WIN98/2000/WIN XP/VIN Vista/WIN7
MTBF	≥10000H
Lifespan	≥100000H
Failed rate	≤1/10000 and no continuous failed pixels
Software	Professional LED video wall system programming software
Storage temperature	-35°C~+85°C
Working temperature	-10°C~+40°C
Working voltage (AC)	220V±10%/50Hz or 110V±10%/60Hz
Average power consumption	233W/m ²
Maximum power consumption	700W/m ²
Cabinet material	Die-cast aluminum cabinet
Color uniformity	≥98%
Protection class	IP5X



Indoor Full Color LED Video Wall

TV-PM166-YX

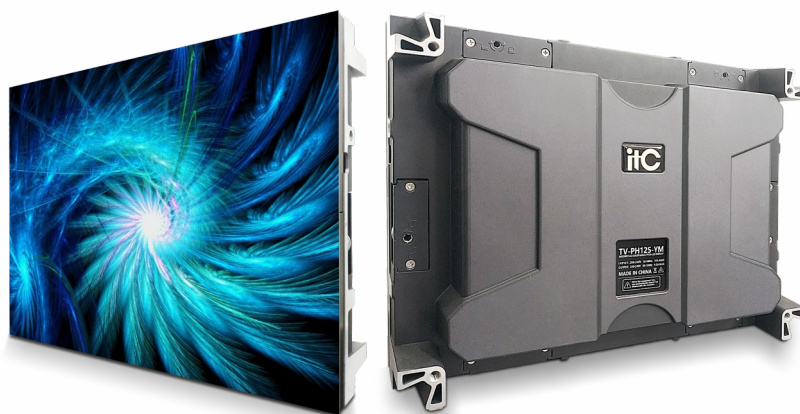

Description:

It has the characteristics of seamless splicing, perfect display, long service lifespan, fast frame changing speed, high refresh rate, good uniformity, wide viewing angle, high grayscale, natural color reproduction, etc. It is widely used in command and dispatch, security monitoring, video conference, studio display, and various conference display occasions.

Feature:

- * Used to monitor and display the situation in real time and play various advertisements.
- * Seamless splicing, and no visual black seam on the screen.
- * The display unit is flexible and compact, and supports flat and curved splicing.
- * DC low-voltage power supply, natural heat dissipation, no fan, and zero noise.
- * When a failure occurs, it only needs to maintain a single LED pixel or a single module, realizing low maintenance cost and fast maintenance speed.
- * Support picture correction, adopt gamma correction technology, achieve point-by-point brightness and color correction.
- * Support smart light control, smartly adjust brightness, improve picture comfort, and save energy.
- * With ultra-wide viewing angle, the screen has a larger viewing range, and the picture is still clear when viewed from any angle.
- * Support ultra-high refresh speed, good screen continuity and high screen fluency.
- * The picture is delicate and realistic, and the grayscale is still excellent in low brightness.
- * Support UHD display, adopt unique image quality enhancement technology to effectively improve image clarity, and the high-speed picture is smooth and no smear.
- * Support integrating 3D, touch screen and somatosensory games and other functions to improve entertainment and interactivity.

Specifications:

Model	B1.667
LED encapsulation	SMD1010 black light
Pixel pitch	1.667mm
Resolution	359856 pixels/m ²
Lamp bead/IC	Nationstar copper wire / high refresh rate
Pixel configuration	1R1G1B
Cabinet resolution	240*180
Cabinet size (mm)	400*300
Cabinet weight	5kg/pc
Working voltage	DC +4.2V
Best viewing distance	≥5m
Horizontal viewing angle	≥160°
Vertical viewing angle	≥160°
Maintenance method	Front maintenance
Graphics card	DVI/HDMI/DP
Video signal	Compatible with PAL/NTSC/SECAM format, support S-Video; VGA; RGB; Composite Video; SDI; DVI; RF; RGBHV; YUV; YC, etc.
Control mode	Synchronous control
Drive device	Constant current drive
Refresh rate	≥3840Hz
Frame rate	≥60Hz
Scanning method	30S
Brightness	200~800CD/m ² (adjustable)
Grayscale	12/14/16bit
Contrast	≥10000:1
Decay rate (after 3-year work)	≤15%
Brightness adjustment method	Auto/Manual: 1~100%
Computer operating system	WIN98/2000/WIN XP/VIN Vista/WIN7
MTBF	≥10000H
Lifespan	≥100000H
Failed rate	≤1/10000 and no continuous failed pixels
Software	Professional LED video wall system programming software
Storage temperature	-35℃~+85℃
Working temperature	-10℃~+40℃
Working voltage (AC)	220V±10%/50Hz or 110V±10%/60Hz
Average power consumption	242W/m ²
Maximum power consumption	725W/m ²
Cabinet material	Die-cast aluminum cabinet
Color uniformity	≥98%
Protection class	IP5X